

### **V250 SERIES** MODEL V250/2AL



Solid arm with spindle retainer supplied loose for welding in the desired position. 10mm added to arm length over V250/2A model.

## Flanged.


**Nominal Holding Force:** 

250 daN

0.38 Kg

Supplied complete with: MB0860 Setscrew & nuts. R/08 Spindle retainer.

See "Accessories" for other

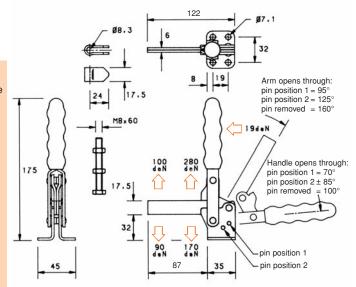

### **V250 SERIES** MODEL V250/2B



The spindle position is adjustable along the arm.

Flanged.


**Nominal Holding Force:** 250 daN


0.38 Kg

### ied complete with:

MB0860 Setscrew & nuts. FW08/15 Flanged washers.

See "Accessories" for other items.





### **V250 SERIES** MODEL V250/2BSS



# STAINLESS STEEL

The spindle position is adjustable along the arm.

Flanged.

**Nominal Holding Force:** 

250 daN

0.38 Kg

Supplied complete with: Setscrew & nuts.

Flanged washers.

BS 304 S15

See "Accessories" for other

