



# Operating Instructions for Threaded Inserts


## Installation Instructions

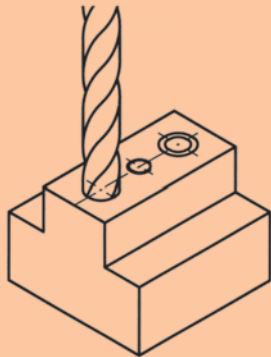


1.\*  
Rebore the old thread and countersink it (82°–100°)

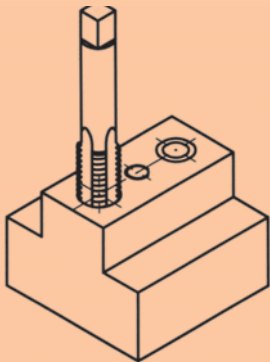

2.\*  
Tap planned thread with a standard screw tap

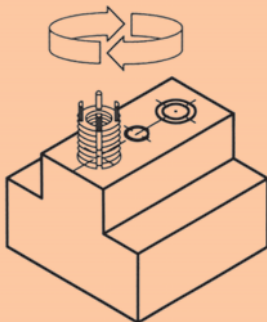


3.  
Screw in the insert to just below the surface (0.3–0.7 mm)

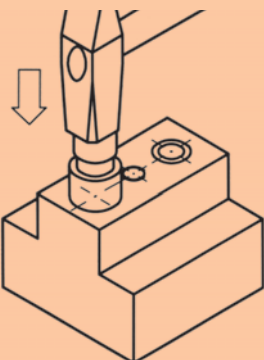


4.  
Drive in the locking pins by striking the assembly tool lightly with a hammer

\* For steps 1 and 2 see table under installation of threaded inserts


## Removal Instructions

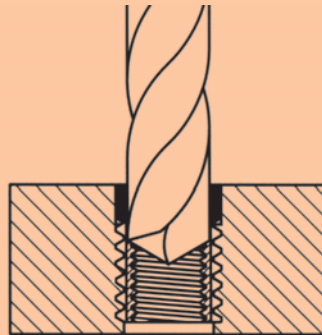


1.\*  
Rebore the material between the locking pins and the internal thread to the specified depth

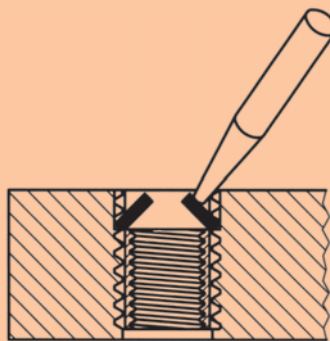

2.  
Bend the locking pins inwards and break them off

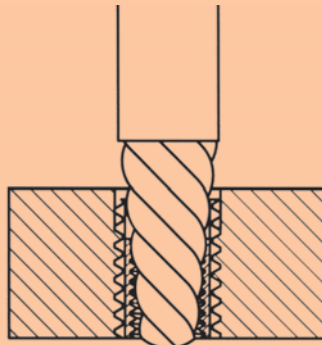

3.  
Remove the old insert with a screw extractor

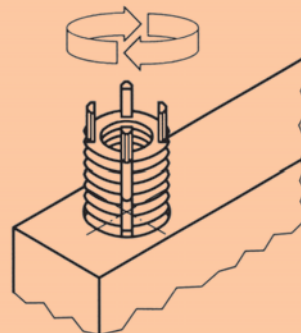

4.  
Install a new threaded insert in the original threaded hole

\* For step 1 see table under removal of threaded inserts

# Solid Body Threaded Inserts



**Material:**

Threaded insert in hardened steel

**Surface finish:**

Phosphated

**Note:**

Solid Body Threaded Inserts allow threaded holes which have been damaged, torn out or jammed to be used again or repaired. This makes it possible to recover scrap and rejects of expensive products.


Solid Body Threaded Inserts are suitable for use in various materials, including light metals and castings.

Permissible deviations: the medium tolerance class applies to the threads listed, i.e. 6g for bolt threads.

Other dimensions  $\pm 0.25$  mm.

**Benefits of Solid Body Threaded Inserts:**

- Quick and easy installation.
- The insert is fixed with pins in order to prevent torsion due to twisting or vibrations.
- No other special tools are needed besides the installation tool.

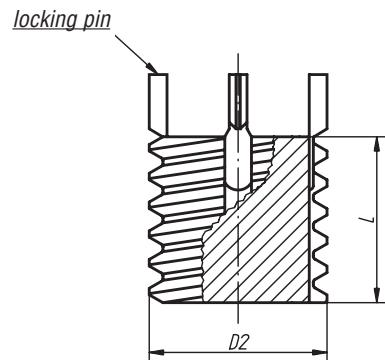

**Solid Body Threaded Inserts and Assembly Tools**

Order No.	Threaded inserts		Assembly tool Order No.	Installation			Removal		
	External thread D2	Length L		Drill $\emptyset$	Countersun k $\emptyset$ +0.25 0	Screw tap	Min. thread depth	Drill $\emptyset$	Drilling depth
07662-08	M 8	8	07662-808	6,9	8,3	M 8	9,5	5,5	4
07662-10 x 125	M 10 x 1,25	10	07662-810	8,8	10,3	M 10 x 1,25	12,5	7,5	4,8
07662-12 x 125	M 12 x 1,25	12	07662-812	10,8	12,3	M 12 x 1,25	14,5	9,5	4,8
07662-14 x 15	M 14 x 1,5	14	07662-814	12,8	14,3	M 14 x 1,5	16,5	11,5	4,8
07662-16 x 15	M 16 x 1,5	16	07662-816	14,8	16,3	M 16 x 1,5	18,5	13,5	4,8
07662-18 x 15	M 18 x 1,5	18	07662-818	16,8	18,3	M 18 x 1,5	20,5	15,5	4,8
07662-20 x 15	M 20 x 1,5	20	07662-820	18,8	20,3	M 20 x 1,5	22,5	17,5	4,8
07662-22 x 15	M 22 x 1,5	22	07662-822	20,7	22,3	M 22 x 1,5	24,5	17,8	6,4
07662-24 x 15	M 24 x 1,5	24	07662-824	22,5	24,3	M 24 x 1,5	26,5	19,8	6,4
07662-30 x 2	M 30 x 2	30	07662-830	28	30,3	M 30 x 2	34,5	25,8	6,4
07662-32 x 2	M 32 x 2	32	07662-832	30	32,3	M 32 x 2	36,5	27,8	6,4
07662-33 x 2	M 33 x 2	33	07662-833	31	33,3	M 33 x 2	37,5	28,8	6,4

Sample order: Solid Body Threaded Insert 07662-10 x 125 / KIPP Assembly Tool 07662-810