

## ANTI-STATIC SINGLE POINT PROBE SP1260



**Length:** Metal barrel: 72mm x 12mm


**Cable:** 2m of screened HT cable is supplied  
Customer may specify up to 10m.

**Options:** Air assistance see AN150, AN300 single point nozzles

**Max. Temperature:** 60°C

**Safety:** 100MOhm resistance for shockless operation

**Power Unit:** PU504 Power Unit (5.5kV)

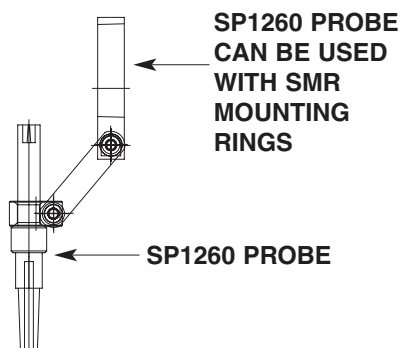

Compact, high performance static eliminator suitable for neutralising the static charge on trim, tapes, yarn and other small objects.

### Performance

Resistively coupled design produces large volume of ionisation for neutralising fast speed and high charges.

The design geometry projects the ionisation to give an operating distance of up to 80mm.


### Construction

Robust stainless steel and PVC body, with nylon cable gland.

All critical parts are encapsulated for a long life and market-leading reliability.


Compact and easy to install.

## SMR ANTI STATIC PROBE MOUNTING RINGS



ANTISTATIC  
MOUNTING RING

AM40 TYPICALLY

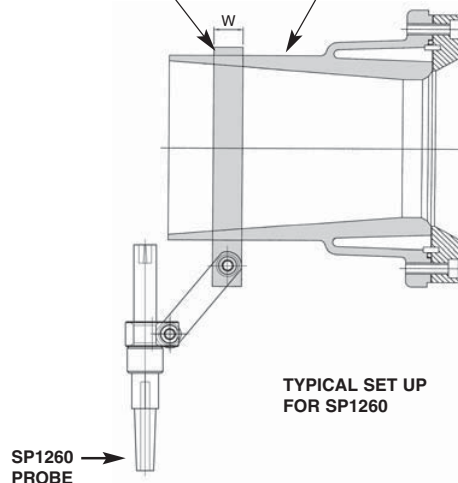

MODEL NO.	AIRMOVER	Ød/mm	ØD/mm	w/mm
SMR 10	AM10	19	35	12
SMR10A	SS10A, AA10A, AM10A	20.5	35	12
SMR 20	AM20	31.6	50	15
SMR 20A	SS20A, AA20A, AA20A	30.5	50	15
SMR 40	AM35, AM40	52	80	15
SMR 40A	AM35A, SS40A, AA40A, AM40A	50.5	80	15
SMR 60A	AM60A, SS60A, AA60A	76.5	108	15
SMR 75A	AM75A, SS75A, AA75A	96.5	130	15