



SWIVEL




FIXED

(NOTE: swivel lock and brake fitted as standard)

SWIVEL CASTORS TOP PLATE DIMENSIONS

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
80	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	135 x 110	105 x 75/85	10
160	135 x 110	105 x 75/85	10
200	135 x 110	105 x 75/85	10

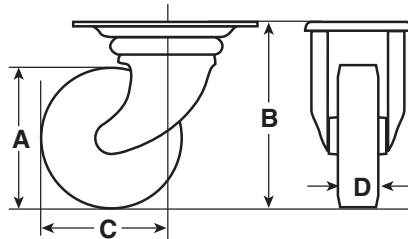

FIXED CASTORS TOP PLATE DIMENSIONS

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
80	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	140 x 114	105 x 75/85	10
160	140 x 114	105 x 75/85	10
200	140 x 114	105 x 75/85	10

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A		B		C		D		Swivel		Fixed	
Wheel Diameter	Overall Height	Swivel Radius	Tread Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg	PART NUMBER	Approx Weight kg		
NYLON CENTRED WHEEL WITH POLYURETHANE TYRE											
80	108	77	30	100	Ball Journal	ES/PN80/30BJ/L	1	EF/PN80/30BJ	0.7		
100	128	87	30	120	Ball Journal	ES/PN100/30BJ/L	1.1	EF/PN100/30BJ	0.8		
125	156	104	40	150	Ball Journal	ES/PN125/40BJ/L	1.5	EF/PN125/40BJ	1.1		
160	195	135	45	300	Ball Journal	ES/PN160/45BJ/L	2.5	EF/PN160/45BJ	1.7		
200	240	155	50	350	Ball Journal	ES/PN200/50BJ/L	3	EF/PN200/50BJ	2.1		