


Brauer have developed a range of jacking units expanding further our comprehensive range of heavy duty castors and wheels. The jacking units are highly adaptable across a broad range of environments and applications. Many options are available giving this new product unsurpassed flexibility for the worldwide market place. Availability and delivery is enhanced due to products being totally manufactured within the wheels and castors division based in the UK. Robust design. Load rating up to 1600kg per unit. Integral swivel mechanism incorporated into jacking castor. Designed to suit our MG fixed castor. Wheel options from 150mm to 300mm diameter. Wheel options include steel, polyurethane and nylon. Jacking units now form part of Brauer comprehensive range of wheels and castors.

Approximate weight: 26Kg

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A	B	C	D				
Wheel Diameter	Overall Height	Overall Length	Wheel Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg
POLYURETHANE TYRED WHEEL							
150	184	206	50	900	Ball Journal	JMG/H150/50BJ	35
200	235	241	40	900	Ball Journal	JMG/H200/40BJ	37
250	286	276	45	1300	Ball Journal	JMG/H250/45BJ	42
300	337	312	50	1500	Ball Journal	JMG/H300/50BJ	47
JACKING UNIT ONLY						JU1600	26

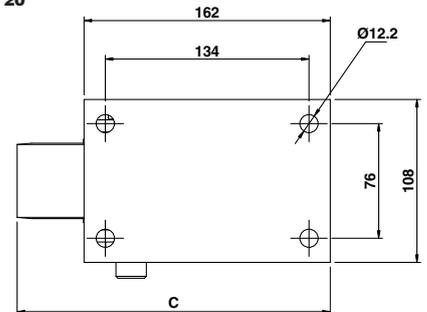

NOTE: Also available with other wheel types.