


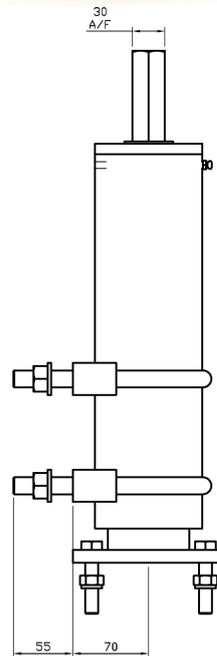


JWG Series


Load rating 2500kg

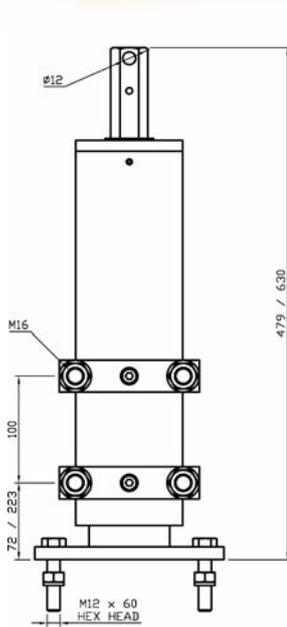

Brauer have developed a Jacking Unit, which is now available for general purchase. The Jacking unit is adaptable to many environments and applications due to our in house design team and manufacturing capability. Many options are available due to the integration of our WG Series Castor into the design, giving unsurpassed flexibility to the market place. Availability and delivery are enhanced because we are a leading UK manufacturer and control all aspects of the Jacking Unit.

Load rating up to 2500kg per unit.

Bespoke design which is now incorporated into our full range of wheels and castors. Robust design. Designed to suit our WG castor range. Wheel options from 150mm to 300mm diameter. Swivel and fixed castor options. Flat foot option for non castor applications. Approximate weight 35Kg.

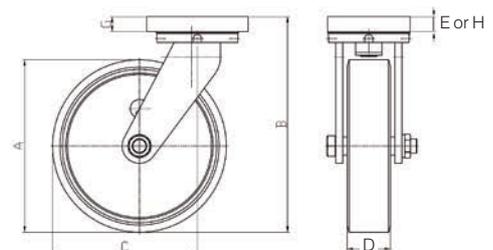

(E) Swivel top plate thickness 26mm

(H) Fixed top plate thickness 12mm

NOTE: Also available with other wheel types.

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A	B	C	D				▽ Swivel	▽ Fixed		
Wheel Diameter	Overall Height	Swivel Radius	Tread Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg	PART NUMBER	Approx Weight kg	
POLYURETHANE TYRED WHEEL										
6"	150	220	125	50	900	Taper Roller	JWGS/H150/50TB	48	JWGF/H150/50TB	48
8"	200	265	160	75	1750	Taper Roller	JWGS/H200/75TB	59	JWGF/H200/75TB	59
10"	250	310	200	70	2000	Taper Roller	JWGS/H250/70TB	57	JWGF/H250/70TB	57
12"	300	375	250	75	2300	Taper Roller	JWGS/H300/75TB	61	JWGF/H300/75TB	61
JACKING UNIT ONLY									JU2500	35

2500KG JACKING UNIT