

V150 SERIES MODEL V150/1BSS



STAINLESS STEEL

The spindle position is adjustable along the arm.

Straight.


Nominal Holding Force:

150 daN

0.15 Kg

plied complete with: MB0650 Setscrew & nuts. NC/06 Neoprene cover.

Material: BS 304 S15

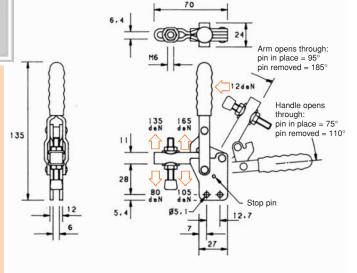

V150 SERIES **MODEL V150/1C**



The spindle is in a fixed position.

Straight.

Nominal Holding Force:


150 daN

0.15 Kg

MB0650 Setscrew & nuts. NC/06 Neoprene cover.

See "Accessories" for other

items.

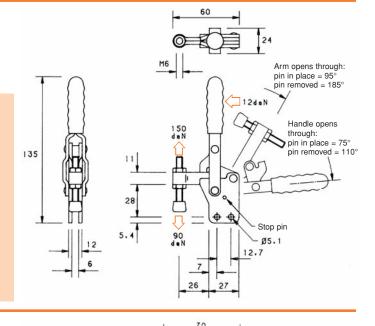

V150 SERIES MODEL V150/2B



The spindle position is adjustable along the arm.

Flanged.

Nominal Holding Force:

150 daN

0.15 Kg

applied complete with:

MB0650 Setscrew & nuts. NC/06 Neoprene cover. FW06/12 Flanged washers.

See "Accessories" for other items.

