

OCKING CLAMPS

V250 SERIES MODEL V250/2BBLC



The spindle position is adjustable along the arm.


Flanged.


Nominal Holding Force: 250 daN

0.38 Kg

Supplied complete with: MB0860 Setscrew & nuts. FW08/15 Flanged washers.

See "Accessories" for other



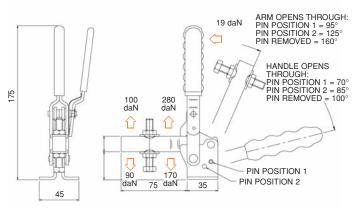

110

M8 x 60

10.6

V250 SERIES MODEL V250/1BBLC




The spindle position is adjustable along the arm.

Nominal Holding Force: 250 daN

0.38 Kg

MB0860 Setscrew & nuts.

FW08/15 Flanged washers. See "Accessories" for other

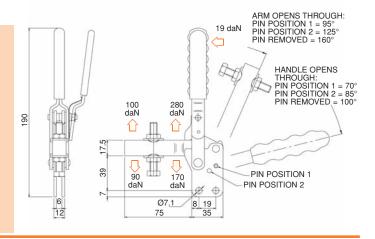

M10 x 80 9

32

4 B

V350 SERIES MODEL V350/2BBLC



The spindle position is adjustable along the arm.

Flanged.

Nominal Holding Force: 350 daN

0.8 Kg

Supplied complete with:

MB1080 Setscrew & nuts.

FW10/20 Flanged washers. See "Accessories" for other items.

ARM OPENS THROUGH: PIN POSITION 1 = 90° PIN POSITION 2 = 120° PIN REMOVED = 180° 23daN HANDLE OPENS THROUGH: PIN POSITION 1 = 70° PIN POSITION 2 = 80° 220 220 daN 450 daN PIN REMOVED = 110° 43 140 daN PIN POSITION 1 PIN POSITION 2 95 50

Ø8.3

45 Ф