





The spindle position is adjustable along the arm.


Straight.

Nominal Holding Force: 75 daN

0.10 Kg

Supplied complete with: MB0535 Setscrew & nuts. FW05/10 Flanged washers. NC/05 Neoprene cover.

See "Accessories" for other items.

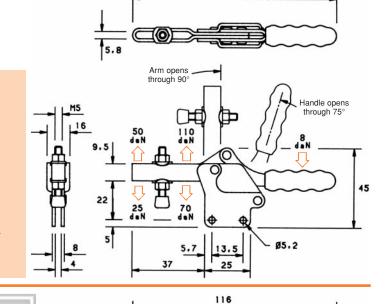

116

H75 SERIES MODEL H75/1BSS





The spindle position is adjustable along the arm.

Straight.


Nominal Holding Force:

75 daN

0.10 Kg

MB0535 Setscrew & nuts. FW05/10 Flanged washers. NC/05 Neoprene cover.

BS 304 S15.

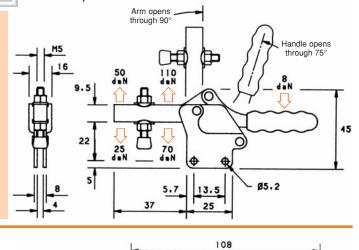

H75 SERIES MODEL H75/1C



The spindle is in a fixed

position.

Straight.

Nominal Holding Force:

75 daN

0.10 Kg

items.

Supplied complete with: MB0535 Setscrew & nuts.

NC/05 Neoprene cover. See "Accessories" for other

