





The spindle position is adjustable along the arm.


Straight.

Nominal Holding Force: 150 daN

0.25 Kg

Supplied complete with: MB0650 Setscrew & nuts. NC/06 Neoprene cover. FW06/12 Flanged washers.

See "Accessories" for other items.

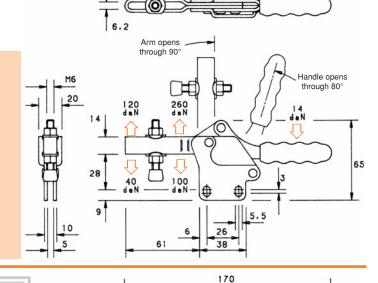

170

H₁₅₀ SERIES MODEL H150/1BSS

STAINLESS STEEL




The spindle position is adjustable along the arm.

Nominal Holding Force: 150 daN

0.25 Kg

MB0650 Setscrew & nuts. NC/06 Neoprene cover. FW06/12 Flanged washers.

BS 304 S15.

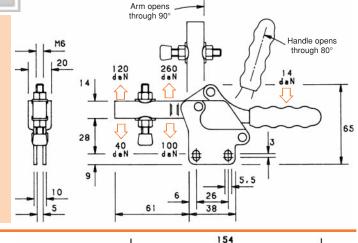

(O

6.2

H₁₅₀ SERIES **MODEL H150/1C**



The spindle is in a fixed position.

Straight.

Nominal Holding Force:

150 daN

0.25 Kg

MB0650 Setscrew & nuts. NC/06 Neoprene cover.

See "Accessories" for other items.

